


Nadellager

GBRI243920-UU-IKO - GBRI243920-UU-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/radial/gbri243920-uu-iko>

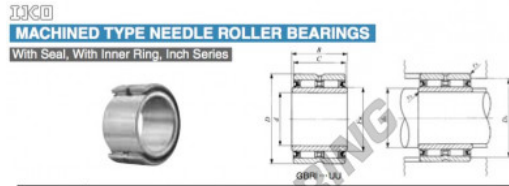

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions mm(inch)		
	With two seals	With one seal		d	D	C
38.100 (1 1/2)	GBRI 243920 UU		400	38.100 (1 1/2)	61.912 (2 1/2)	31.750 (1 1/4)

B	F _w	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C ₀ N	Allowable rotational speed ⁽²⁾ rpm	Assembled inner ring	
		d _{min}	d _{max}	D _s Max.					r _{as max} ⁽¹⁾
32.000	47.625 (1 7/8)	43.3	45	56.2	1	61 100	121 000	1 700	LRBZ 243020

Notes: ⁽¹⁾ Minimum allowable value of chamfer dimension r
⁽²⁾ Allowable rotational speed applies to grease lubrication.
 Remark: This roller ring has an oil groove and an oil hole.
 2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952383477
Innendurchmesser	38.1 mm
Außendurchmesser	61.912 mm
Dicke	31.75 mm
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE