


Gelenklager GE GE100GS-2RS-IKO - GE100GS-2RS-IKO

<https://www.123kugellager.at/kugellager-gehauselager/gelenkkopfe-gelenklager/ge/ge100gs-2rs-iko>

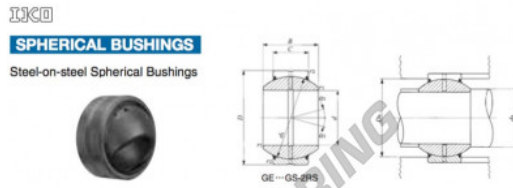

Shaft dia. mm	Identification number		Mass (ref.) kg	Boundary dimensions mm						Permissible tilting angle degree		
	Without seals	With seals		d	D	B	C	d_s	r_1 (1)	r_2 (2)	α	α_1
100		GE 100GS-2RS	6.15	100	160	85	55	140	1	1	14	12
Mounting dimensions mm		Dynamic load capacity C_d		Static load capacity C_s								
d_s	D_s											
Min.	Max. (2)	Max.	Min.	N	N							
105.5	111	154.5	138	755 000	4 530 000							

Notes (1) Minimum allowable value of chamfer dimensions r_1 and r_2 .
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_s .
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952392493
Innendurchmesser	100 mm
Außendurchmesser	160 mm
Dicke	85 mm
Typ	GE
Schmierung	ohne
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE