


# Kurvenrollen CFE20-VUUR-IKO - CFE20-VUUR-IKO

<https://www.123kugellager.at/kugellager-gehauselager/rillenkugellager/kurvenrollen/cfe20-vuur-iko>

IKO

## CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Screwdriver Slot

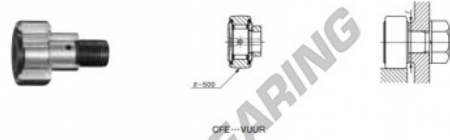

| Outside diameter of eccentric outer ring<br>mm | Identification number   |                             |                         |                             | Mass (Ref.) |    |    |                |
|--|-------------------------|-----------------------------|-------------------------|-----------------------------|-------------|----|----|----------------|
|  | Shield type             |                             | Sealed type             |                             | g           | D  | C  | d <sub>e</sub> |
|  | With crowned outer ring | With cylindrical outer ring | With crowned outer ring | With cylindrical outer ring |             |    |    |                |
| 27   |                         |                             |                         |                             | 505         | 52 | 24 | 27             |
|  | <b>CFE 20 VUUR</b>      |                             |                         |                             |             |    |    |                |

| Boundary dimensions mm |                |                  |                               |                |                |                |                |  |                |                                    |                                 |                                     |   |                                    |
|------------------------|----------------|------------------|-------------------------------|----------------|----------------|----------------|----------------|--|----------------|------------------------------------|---------------------------------|-------------------------------------|---|------------------------------------|
| G                      | B <sub>3</sub> | B <sub>max</sub> | B <sub>1</sub> <sub>max</sub> | B <sub>2</sub> | C <sub>1</sub> | g <sub>1</sub> | G <sub>1</sub> | r <sub>1</sub> <sup>(1)</sup> <sub>min</sub> | Eccentricity E | Mounting dimension f<br>Min.<br>mm | Maximum operating torque<br>N·m | Basic dynamic load rating<br>C<br>N | Basic static load rating<br>C <sub>0</sub><br>N | Maximum allowable static load<br>N |
| M20 × 1.5              | 19.5           | 25.6             | 66.1                          | 40.5           | 0.8            | 8              | 21             | 1  | 0.8            | 34                                 | 119                             | 33 200                              | 64 500  | 37 500                             |

## PRODUKTMERKMALE

|                  |               |
|------------------|---------------|
| Marke            | IKO           |
| N° Ean13         | 3663952458083 |
| Innendurchmesser | 27 mm         |
| Außendurchmesser | 52 mm         |
| Dicke            | 24 mm         |
| Gewicht          | 505 g         |
| Verpackung       | 1             |

[kontakt@123kugellager.at](mailto:kontakt@123kugellager.at)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE