


Nadelhülsenlager TAM4020-IKO - TAM4020-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/nadelhulsenlager/tam4020-iko>

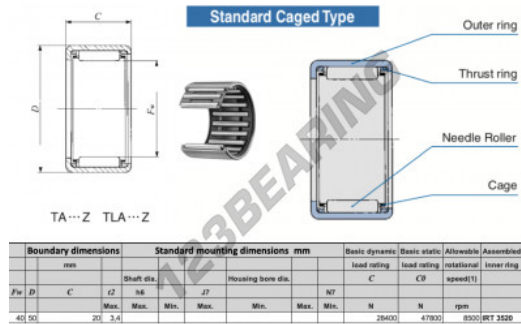

Boundary dimensions		Standard mounting dimensions mm						Basic dynamic		Basic static		Allowable	Assembled
mm		Shaft dia.		Housing bore dia.		NT		load rating	load rating	rotational	inner ring		
For	D	C	t2	h4	J7	Min.	Max.	Min.	Max.	CB	speed(U)		
	40	50	20	3,4						28400	47800	8500	RT 3250

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060599704
Innendurchmesser	40 mm
Außendurchmesser	50 mm
Dicke	20 mm
Grenzdrehzahl	8500 rpm
Dynamische Belastung	28.4 kN
Statische Belastung	47.8 kN
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE