


Nadelhülsenlager TAM5530-IKO - TAM5530-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/nadelhulsenlager/tam5530-iko>

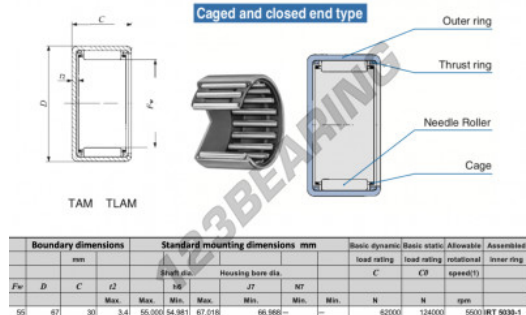

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable	Assembled
mm			Shaft dia.		Housing bore dia.				C	CF	speed(%)	inner ring		
Fw	D	C	Max.	Min.	Max.	Min.	Max.	Min.	N	N	rpm			
50	67	30	55,000	54,981	67,016	66,960	--	--	62000	124000	5500	RT 9030-1		

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060599896
Innendurchmesser	55 mm
Außendurchmesser	67 mm
Dicke	30 mm
Grenzdrehzahl	5500 rpm
Dynamische Belastung	62 kN
Statische Belastung	124 kN
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE