


# Nadelhülsenlager BAM2812-IKO - BAM2812-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/nadelhulsenlager/bam2812-iko>

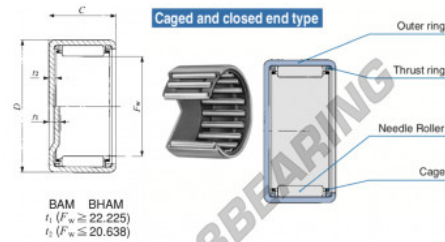

| Boundary dimensions mm(inch) |                |              | Standard mounting dimensions mm |     |       | Basic dynamic load rating | Basic static load rating | Admissible rotational speed (rpm) | Admissible inner ring diameter |
|------------------------------|----------------|--------------|---------------------------------|-----|-------|---------------------------|--------------------------|-----------------------------------|--------------------------------|
| $D$                          | $B$            | $C$          | $r$                             | $s$ | $l_1$ | $JT$                      | $N$                      | $N_0$                             | RB 2412                        |
| 44.452 (1.749)               | 33.875 (1.334) | 19.051 (750) | 0.2                             | 0.1 | Min   | Min                       | 25200                    | 44500                             | 7500                           |

## PRODUKTMERKMALE

|                      |               |
|----------------------|---------------|
| Marke                | IKO           |
| N° Ean13             | 3616060600783 |
| Innendurchmesser     | 44.45 mm      |
| Außendurchmesser     | 53.975 mm     |
| Dicke                | 19.05 mm      |
| Grenzdrehzahl        | 7500 rpm      |
| Dynamische Belastung | 25.2 kN       |
| Statische Belastung  | 44.5 kN       |
| Verpackung           | 1             |

[kontakt@123kugellager.at](mailto:kontakt@123kugellager.at)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE