


Nadelhülsenlager BA1614-Z-IKO - BA1614-Z-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/nadelhulsenlager/ba1614-z-iko>

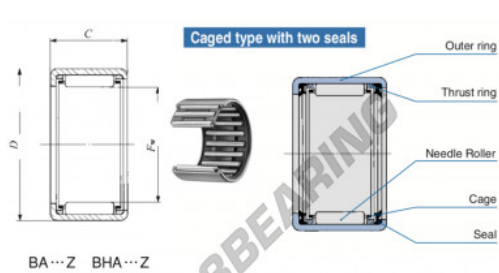

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
<i>F_w</i>	<i>D</i>	<i>C</i>	<i>a₂</i>	<i>a₆</i>	Shaft dia.	Housing bore dia.	<i>C</i>	<i>C₀</i>	<i>n</i>	<i>n₀</i>	
			Min.	Max.	Min.	Max.	Min.	Min.	rpm	RB 1214	
25.400	1.31.750	11.41	22.221	8.751	2.81	25.400	25.387	31.764	16900	30400	15000

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060601193
Innendurchmesser	25.4 mm
Außendurchmesser	31.75 mm
Dicke	22.22 mm
Grenzdrehzahl	15000 rpm
Dynamische Belastung	16.9 kN
Statische Belastung	30.4 kN
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE