


Nadelhülsenlager BA1916-Z-IKO - BA1916-Z-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/nadelhulsenlager/ba1916-z-iko>

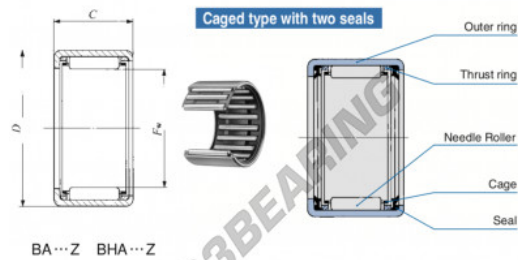

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(S)	Assembled inner ring
F_w	D	C	d_2	Shaft dia. d	Housing bore dia. D	C	C_0	rpm		
30.162 (1.1870)	38.100 (1.5000)	25.40 (1.000)	2.8	Max. 30.162 Min. 30.146	Max. 38.114 Min. 38.089	25800	45300	12000	—	

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060601308
Innendurchmesser	30.162 mm
Innendurchmesser	1 3/16" inch
Außendurchmesser	38.1 mm
Außendurchmesser	1 1/2" inch
Dicke	25.4 mm
Dicke	1" inch
Grenzdrehzahl	12000 rpm
Dynamische Belastung	25.8 kN
Statische Belastung	45.3 kN
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE