


## Nadelhülsenlager BA2610-Z-IKO - BA2610-Z-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/nadelhulsenlager/ba2610-z-iko>

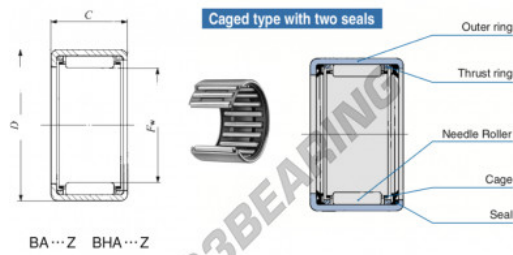

| Boundary dimensions mm(inch) |            |             | Standard mounting dimensions mm |                       |                      |          | Basic dynamic load rating | Basic static load rating | Allowable rotational speed | Assembled inner ring |
|------------------------------|------------|-------------|---------------------------------|-----------------------|----------------------|----------|---------------------------|--------------------------|----------------------------|----------------------|
| <i>F<sub>w</sub></i>         | <i>D</i>   | <i>C</i>    | <i>d</i>                        | <i>H<sub>15</sub></i> | <i>J<sub>7</sub></i> | <i>C</i> | <i>C<sub>0</sub></i>      | rpm                      |                            |                      |
| 41.275 (1 5/8)               | 50.800 (2) | 15.88 (5/8) | 42                              | 15                    | 17                   | 18.9     | 30                        | 8000                     | 2218                       |                      |

### PRODUKTMERKMALE

|                      |               |
|----------------------|---------------|
| Marke                | IKO           |
| N° Ean13             | 3616060601490 |
| Innendurchmesser     | 41.275 mm     |
| Außendurchmesser     | 50.8 mm       |
| Dicke                | 15.88 mm      |
| Grenzdrehzahl        | 8000 rpm      |
| Dynamische Belastung | 18.9 kN       |
| Statische Belastung  | 30 kN         |
| Verpackung           | 1             |

[kontakt@123kugellager.at](mailto:kontakt@123kugellager.at)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE