


## Nadelhülsenlager BA66-Z-IKO - BA66-Z-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/nadelhulsenlager/ba66-z-iko>

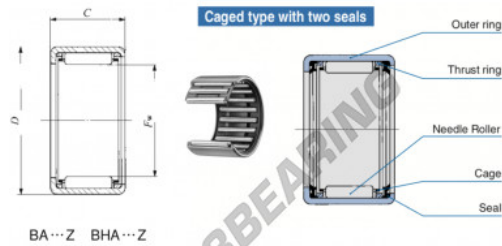

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable speed	Assembled inner ring
$F_w$	$D$	$C$	$Q$	$H$	Housing bore dia.	$C$	$C_0$	rpm	
	Max.	Max.	Min.	Max.	Min.	N	N		
9.525 (3/8)	14.288 (1/2)	9.52 (3/8)	1			3090	3080	40000	--

### PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060601766
Innendurchmesser	9.525 mm
Innendurchmesser	3/8" inch
Außendurchmesser	14.288 mm
Außendurchmesser	9/16" inch
Dicke	9.52 mm
Dicke	0.375" inch
Grenzdrehzahl	40000 rpm
Dynamische Belastung	3.09 kN
Statische Belastung	3.08 kN
Verpackung	1

[kontakt@123kugellager.at](mailto:kontakt@123kugellager.at)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE