


## Nadelhülsenlager BA118-Z-IKO - BA118-Z-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/nadelhulsenlager/ba118-z-iko>

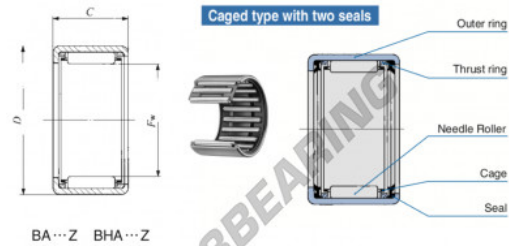

| Boundary dimensions mm(inch) |               | Standard mounting dimensions mm |       |        |        | Basic dynamic load rating | Basic static load rating | Allowable rotational speed <sup>(1)</sup> | Assembled inner ring |       |       |
|------------------------------|---------------|---------------------------------|-------|--------|--------|---------------------------|--------------------------|---|----------------------|-------|-------|
| $F_w$                        | $D$           | $C$                             | $r_2$ | $r_1$  | $r_2$  | $C$                       | $C_0$                    | rpm                                       |                      |       |       |
| 17.462 (1116)                | 22.225 ( 8.8) | 12.726 (500)                    | 1.3   | 17.462 | 17.451 | 22.227                    | 22.216                   | 6140                                      | 6855                 | 25000 | RB 88 |

### PRODUKTMERKMALE

|                      |               |
|----------------------|---------------|
| Marke                | IKO           |
| N° Ean13             | 3616060603128 |
| Innendurchmesser     | 17.462 mm     |
| Außendurchmesser     | 22.225 mm     |
| Dicke                | 12.7 mm       |
| Grenzdrehzahl        | 25000 rpm     |
| Dynamische Belastung | 6.14 kN       |
| Statische Belastung  | 88.5 kN       |
| Verpackung           | 1             |

[kontakt@123kugellager.at](mailto:kontakt@123kugellager.at)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE