


## Zylinderrollenlager NCF2940CV-SKF - NCF2940CV-SKF

<https://www.123kugellager.at/kugellager-gehauselager/zyylinderrollenlager/zyylinder/ncf2940cv-skf>

Dimensions d'encadrement			Charges de base		Vitesses de base		Désignation
d	D	B	dynamique C	statique C <sub>0</sub>	Vitesse de référence tr/min	Vitesse limite	
mm			kN				
200	280	48	528	965	1000	1300	NCF 2940 CV

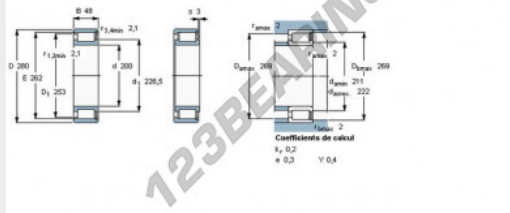

Technical drawing showing dimensions and calculation coefficients for the NCF 2940 CV roller bearing. Dimensions include: D = 280 mm, d = 200 mm, B = 48 mm, E = 263 mm, D<sub>1</sub> = 253 mm, d<sub>1</sub> = 226,5 mm, r<sub>1</sub> = 2,5 mm, r<sub>2</sub> = 2,5 mm, r<sub>3</sub> = 3 mm, D<sub>max</sub> = 269 mm, D<sub>min</sub> = 269 mm, D<sub>max</sub> = 269 mm, D<sub>min</sub> = 211 mm, D<sub>max</sub> = 222 mm, r<sub>max</sub> = 2 mm. Calculation coefficients: k<sub>r</sub> = 0,2, k<sub>a</sub> = 0,3, Y = 0,4.

### PRODUKTMERKMALE

Marke	SKF
N° Ean13	7316572343302
Innendurchmesser	200 mm
Außendurchmesser	280 mm
Dicke	48 mm
Grenzdrehzahl	1300 rpm
Gewicht	9110 g
Dynamische Belastung	528 kN
Statische Belastung	965 kN
Verpackung	-
Standard	-

[kontakt@123kugellager.at](mailto:kontakt@123kugellager.at)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE