


Gelenklager GE SBB44-2RS-IKO - SBB44-2RS-IKO

<https://www.123kugellager.at/kugellager-gehauselager/gelenkkopfe-gelenklager/ge/sbb44-2rs-iko>

IKO
SPHERICAL BUSHINGS
Steel-on-steel Spherical Bushings Inch Series

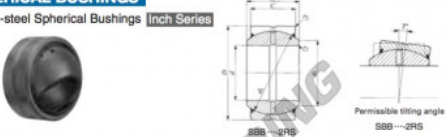

Shaft dia. mm (inch)	Identification number		Mass (Ref.) kg	Boundary dimensions mm(inch)			
	Without seal	With seals		d	D	B	C
69.850 (2 3/4)		SBB 44-2RS	2.44	69.850 (2 3/4)	111.125 (4 3/8)	61.11 (2.406)	52.37 (2.062)
Radial internal clearance mm	Mounting dimensions mm		Dynamic load capacity C _d N	Static load capacity C _s N			
	d _k Min./Max.	d ₁ r ₁ max. r ₂ max.		r ₁ Min. N	r ₂ Min. N	r ₃ Min. N	
100(3.937)	0.10 / 0.20	79.0	0.6	0.8	514 000	3 080 000	

Notes: (1) Minimum allowable value of chamfer dimensions r₁ and r₂.
(2) When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_k.
Remark: 1. The inner ring and the outer ring have an oil groove and two oil holes, respectively.
2. Not provided with prepacked grease. Perform proper lubrication for use.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952392912
Innendurchmesser	69.85 mm
Innendurchmesser	2 3/4" inch
Außendurchmesser	111.125 mm
Außendurchmesser	4 3/8" inch
Dicke	61.11 mm
Dicke	2.406" inch
Typ	GE
Schmierung	ohne
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE