


Axial nadellager AZ659018-IKO - AZ659018-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/axial-nadellager/az659018-iko>

IKO

THRUST BEARINGS

Thrust Roller Bearings

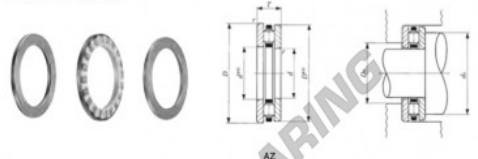

Shaft dia. mm	Identification number							
	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g	
65	AZ 659018	380	AZK 65907.5	132	WS 6590	GS 6590	124	

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ^(*)
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
65	90	18	65.05	89.5	7.5	5.25	1	70	86	86	71	68 300	247 000	4 000

Notes: (*) Minimum allowable value of chamfer dimension r
(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3616060466051
Innendurchmesser	65 mm
Außendurchmesser	90 mm
Dicke	18 mm
Gewicht	380 g
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE