


Axial nadellager AZK28044030-IKO - AZK28044030-IKO

<https://www.123kugellager.at/kugellager-gehauselager/nadellager/axial-nadellager/azk28044030-iko>

IKO
THRUST BEARINGS

Thrust Roller Bearings

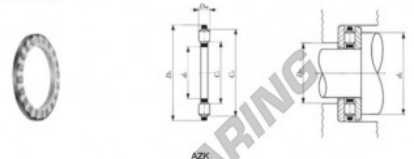

Identification number							
Shaft dia. mm	Thrust roller bearing	Mass (Ref.) g	Thrust roller bearing	Mass (Ref.) g	Inner ring	Outer ring	Mass (Ref.) g
280	AZ 28044080	54 600	AZK 28044030	19 200	WS 280440	GS 280440	17 700

Boundary dimensions mm										Standard mounting dimensions mm		Basic dynamic load rating C	Basic static load rating C ₀	Allowable rotational speed ⁽²⁾
d	D	T	d _c	D _c	D _w	B	r _s (1)	C ₁	C ₂	d _s Min.	D _s Max.	N	N	rpm
280	440	80	280.15	438	30	25	5	309	422	420	311	1 420 000	7 490 000	800

Notes: (1) Minimum allowable value of chamfer dimension r
(2) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 25% of this value is allowable.

PRODUKTMERKMALE

Marke	IKO
N° Ean13	3663952487991
Innendurchmesser	280 mm
Innendurchmesser	11.024" inch
Außendurchmesser	440 mm
Außendurchmesser	17.323" inch
Dicke	30 mm
Dicke	1.181" inch
Gewicht	19200 g
Verpackung	1

kontakt@123kugellager.at

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE