


# Winkelgelenke SA

## BRM06-00-502-DURBAL - BRM06-00-502-DURBAL

<https://www.123kugellager.at/kugellager-gehauselager/gelenkkopfe-gelenklager/sa/brm06-00-502-durbal>

### BRM06-00-502

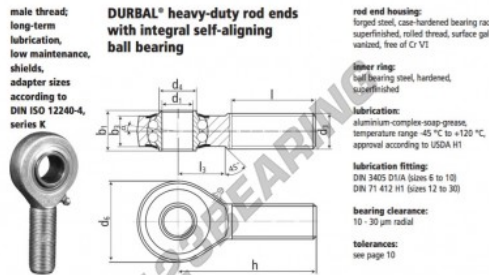

male thread:  
long-term  
lubrication,  
low maintenance,  
shields,  
adapter sizes  
according to  
DIN ISO 12240-4,  
series K

**DURBAL® heavy-duty rod ends  
with integral self-aligning  
ball bearing**

rod end housing:  
forged steel, case-hardened bearing race,  
superfinished, rolled thread, surface gal-  
vanized, free of Cr-VI

inner ring:  
self-bearing steel, hardened,  
superfinished

lubrication:  
aluminum-complex-soap-grease,  
temperature range -45 °C to +120 °C,  
approval according to USDA H1

lubrication fitting:  
DIN 2455 D11A (sizes 6 to 10)  
DIN 21 412 H1 (sizes 12 to 30)

bearing clearance:  
10 - 30 µm radial

tolerances:  
see page 10

order number		measurements [mm]									
Type	right-hand thread	left-hand thread	d <sub>1</sub>	d <sub>2</sub>	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	b <sub>1</sub>	b <sub>2</sub>	h	
BRM 06 -00		-502	6	M 6		9,0	20	9	6,75	36	
measurements [mm]		weight		calculation-factors		rotational speed limit		basic load rating		stat.	
Type	l	l <sub>3</sub>	α [°]	[kg]	Y	v <sub>0</sub>	lim. C [N]	lim. C <sub>0</sub> [N]	lim. C <sub>10</sub> [N]	lim. C <sub>50</sub> [N]	lim. C <sub>100</sub> [N]
BRM 06	22	12	8,0	0,019	2,09	2,19	1350	2750	650		

## PRODUKTMERKMALE

Marke	DURBAL
N° Ean13	3663952506937
Innendurchmesser	6 mm
Außendurchmesser	20 mm
Dicke	9 mm
Typ	SA
Gewicht	19 g
Gewinde	Linksgewinde
Schmierung	mit
Verpackung	1

[kontakt@123kugellager.at](mailto:kontakt@123kugellager.at)

+49 (0) 800 001 076 6

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE